

VICUT



ROLL FEEDING CUTTING PLOTTER GC7000

GC-140/180

Most competitive cutter plotter for automotive
after market, signage, labels, etc.

SAMPLE DISPLAY



Interior protection film



Heat Transfer Vinyl



Paint Protection Film (PPF)



Vehicle Wrap



Reflective Sticker




Vinyl Sticker

PRODUCT PROFILE

VICUT GC7000 series roll feeding cutting plotters offer advanced solution for users from automotive aftermarket, road safety, signage, graphic and counter-top installation. The vinyl cutter plotter is capable of processing paint protection film (PPF), window tinting, regular reflective film, sandblast resist rubber, card paper, self-adhesive vinyl, Amberlith and Rubylith, etc.

MAIN FEATURES




Cutting small text strings accurately

It is able to cut small text strings, such as circles sized $\Phi 0.8\text{mm}$, characters sized $1 \times 1\text{mm}$ and numbers sized $3 \times 3\text{mm}$, and it is easy to tear off the scraps.



Stable Accurate Tracking for 7000mm / 23ft

Leading most of the competitors, the GC7000 series is able to do stable long length tracking for 7000mm/23ft, which is an important feature for high-level processing, it is ideal for big sign, pattern making.

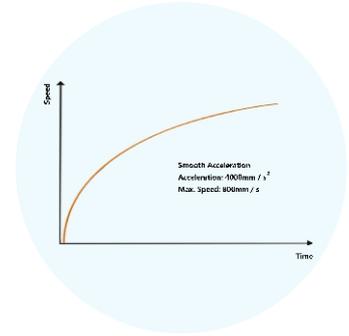


Fast speed

Max. cutting speed reach to 800mm/s, acceleration speed reach to 4000mm/s.




Electrostatic elimination

The complete elimination of static interference is especially important for PPF installers. Gc7000 cutter plotter eliminates the static interference successfully having been tested year-round in different weather conditions.

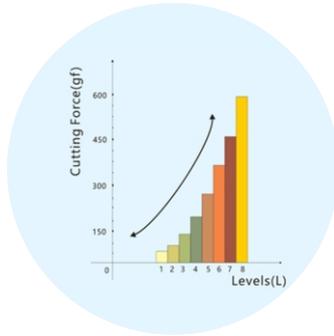

Cutting force in 8 Steps

User is enabled to put different colors for different cutting paths, and set the processing sequence as color sequence, and different paths are processed by different steps of cutting force.

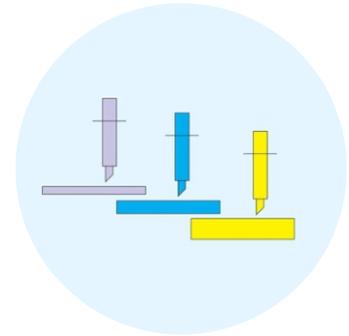

Multiple layers solution

For medias with multiple layers, different cutting force is applied for different layer.



Handshake Protocol

We supply Software Development Kit / SDK to match with client's software, which deepen cooperation between VICUT and Professional clients.



No Need OVERCUT


On every cutting path, the start point and end point coincide accurately, while no need any OVERCUT.



DXF Direct Output


Unnecessary to do any format conversion, GC7000 cutter plotter is compatible with .DXF file directly.

DETAILS DESCRIPTION

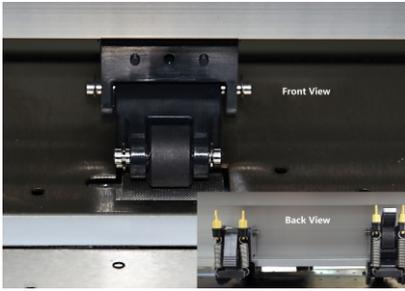


Accurate Rigid Push Rollers

Our push rollers are made from hard materials, it is capable of working accurately for long time. The push rollers can be set to two pressure levels: Strong/Low. The combination of accurate rigid push rollers, precise material feeding rollers and quality media bracket rollers ensure stable long length tracking of material.

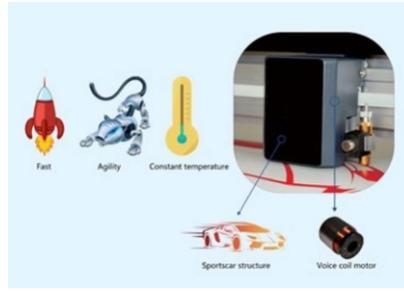


Advanced Tool Carriage

Tool Carriage is one of the most important parts of the machine. Taking the sport car structure, driven by silent voice coil motor, GC7000 plotter's tool carriage is featured as fast, more agility and no overheat for long-term non-stop operation.

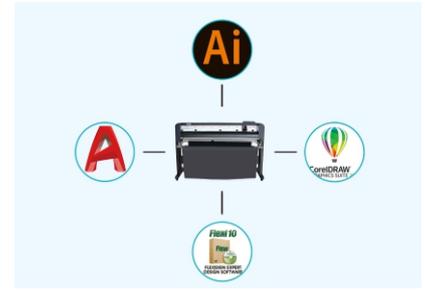


Compatible with AutoCAD, AI, CorelDRAW and Flexisign.

Leading the same industry, we make software by ourself, we are able to adapt our system to the latest version of popular CAD / CAM software, such as AutoCAD, Adobe Illustrator, CorelDRAW and Flexisign and more.

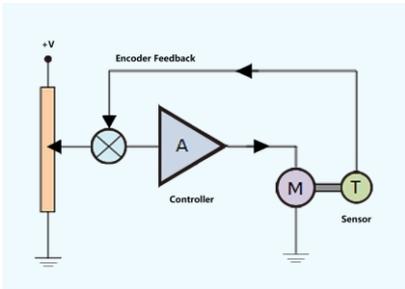

Servo Motor / Closed Loop Control

Cutting / Plotting will be stopped when tool carriage is overloading, it is an important safety feature to protect tool carriage when media is jammed.

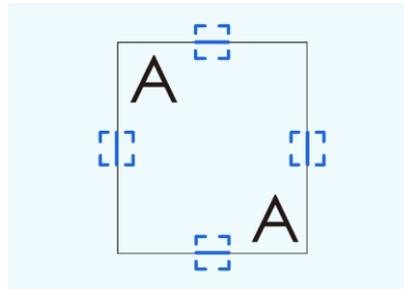


Media Sensor(optional)

It is applied to measure the size of media, the cutting/plotting operation won't be carried out if media size is not big enough for the contents, and controller will ask operator to enlarge the media or decrease the size of contents. Media sensor helps greatly in saving media and increasing efficiency.



Quality components

For more outstanding performance and long-term reliable working, we only use world class brand name components such as BANDO belt, MINEBEA bearing, etc.

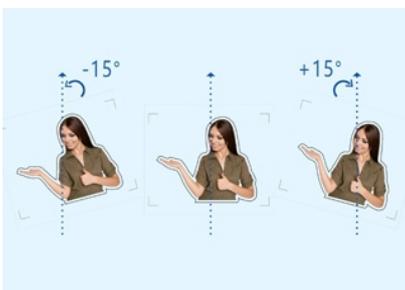


Advanced Registration Marks Sensing

One-click to add registration marks and generate contour(s) of the object(s). One-click to read the registration marks and carry out the contour cutting. To match the cutting path(s) and contour(s) to the best, fine adjustment with either keypad or software is available. If material is placed askew ($\leq 15^\circ$), the cutter is still able to work fine, this feature helps to save time.




Making Blade-tip Compensation by chip

Our system makes blade-tip compensation by hardware(main board) instead of software, the cutter works with constant high precision no matter what kind of CAD / CAM software is applied.

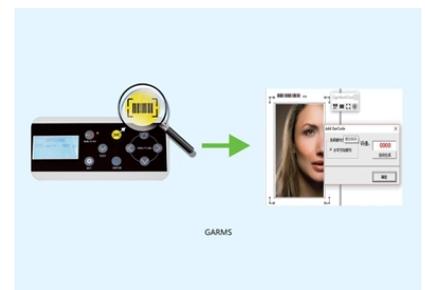


Scanning Bar-code when offline

One-click to spot the cutting job from those saved in the USB memory by scanning the Bar-code which is printed in media, while not requiring connecting to PC. This function is especially helpful to increase the productivity when there are many files stored in the USB memory. (Note: Barcode function works for laser sensor, QR-code works for CCD camera.)

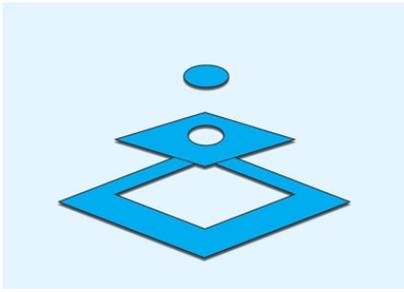


Half Cut / Perforation Cut

Half cut / Perforation cut are available, every time you may carry out either one or both.

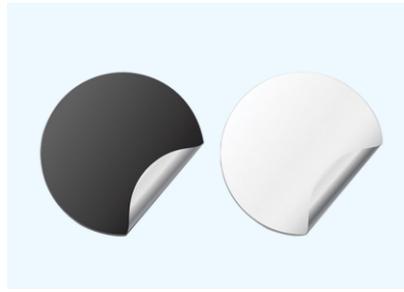

Clean Smooth Edge Quality

The Grating Ruler and correspondent cutting force management deliver clean smooth edge quality, even for the most complex jobs. GC7000 cutter plotter series is able to cut small text strings and it is easy to peel off the waste material, which cut down workload greatly for the users.

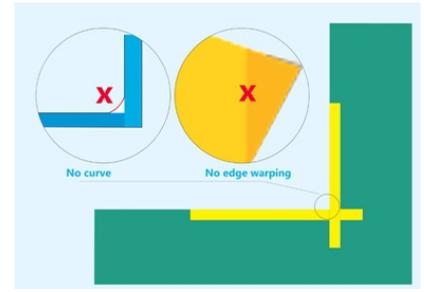


Advanced Algorithm

Advanced algorithm and quality hardware allow for obvious elimination of distorted, rounded or lifted corners. Advanced algorithm of motion controller, optimized tool paths, servo motor on XY axis, voice coil motor on Z axis and quality precision driving system, all of these elements make the machine moving faster and processing with more efficiency.




One-click to Clear History

One-click deletion button for the currently print document.
Transfer working files by USB memory and support repeated operation.

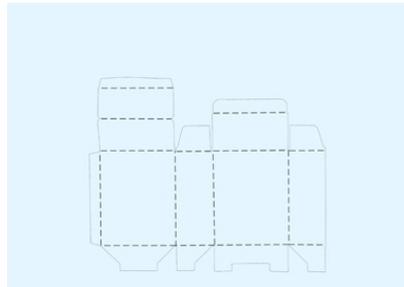


Dotted lines cutting

Dotted lines cutting is applicable for medias with 2 layers typically and also kinds of paper.

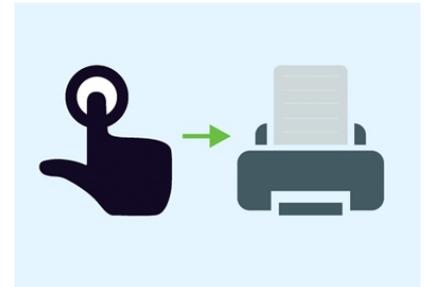


One-click to Install Print Driver

One-click to install print driver and printout with USB, send cutting job from any CAD software that with printer feature. Our print driver works with Windows 32/64 bit.

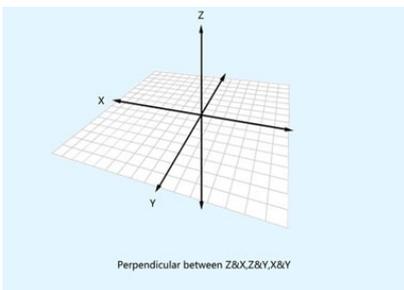

Leading Calibration

Industry leading technology is applied to calibrate the perpendicular between different axes and the parallelism between gantry and cut table.

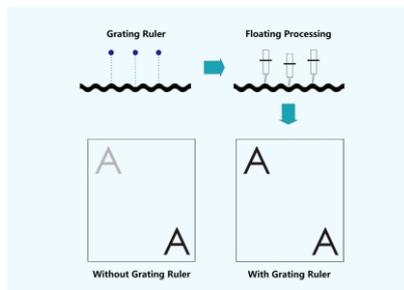

Grating ruler

It is inevitable that the cut table or material surface is not at the same height from point to point, we take Grating Ruler, a precise optical device, to measure the distance between blade tip and material surface in real time, and the cutting depth is adjusted in every 0.01mm by the controller in real time according to the value of distances measured. Subsequently, the blade travels up and down as material surface goes up and down in order to keep the same cutting depth at any position of that tool path across entire working size. In short the cutting depth is consistent; you will not see different shades.

TECHNICAL PARAMETERS

MODEL	GC-140	GC-180
Max Cutting Width (Non-contour Cutting)	1290mm	1630mm
Max Cutting Width (Contour Cutting)	1220mm	1520mm
Max. Mountable Media Width	1440mm	1780mm
Min. Mountable Media Width	70mm	
Max. Cutting Speed	800mm/s	
Max. Cutting Force	450G in 8 steps	
Cutting Force Setup	Adjustable in every 1gf	
Drive	Servo	
Mechanical Resolution	0.0125mm	
Min. Circle Diameter	0.8mm	
Min. Character Size	1x1mm	
Min. Number Size	3x3mm	
IOS	Win10/8/7/XP	
Memory Buffer	2MB	
Software	Windows Driver, SignWork Pro, CAD to Plot Pro	
LCD	English	
File Format	HP-GL,PLT	
Port in Standard	U-disk, USB,RS-232	
Registration Marks Sensing	CCD Camera /laser sensor	
Power Input	90V-240V AC,50-60Hz	
Power Consumption	60w	
Cutter Holder/Pen Holder	1 for each	
Cutter Blade Diameters	2.0mm	
Cutter Blade Angles	30°,45°,60°	
Types of Pen	Water based fiber-tip pen & Oil based ball pen	
Method to Fix Material	Push rollers	
Media support roller	Included	Included
Cloth Basket	Option	Option
G.W./N.W.	68/48kg	85/57kg
Package Size L-W-H	171x40x57cm (0.4CBM)	220x40x57cm (0.5CBM)

TOOLS & ACCESSORIES




Fine Blade Holder

This precision engineered components sits in the advanced carriage and holds the cutting blade of choice. The tool is manually adjustable to obtain the desired amount of "blade out" for the job in hand.



Calibration Tool

Used at set up and then periodically, to calibrate the cutter.

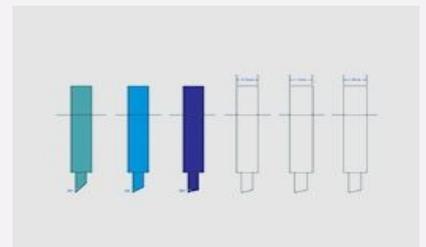

Cutting Blades

Various blades available for different applications.
 Angle:30°/Φ2.0mm for thicker media or smaller character.
 Angle:60°/Φ2.0mm for reflective film.
 Angle:45°/Φ2.0mm for PPF.

PACKING PHOTOS



OUR PHILOSOPHY

01

Adhering to the “integrity, sharing, win-win” cooperation concept.

02

Grow together with agents, implement the unified price rules, strictly regulate the sales channels, and provide necessary resource support and regional protection.

03

Focus on user needs, explore product applications, optimize product functions, and truly help users improve efficiency and create revenue.

OUR SERVICE



All-round technical support & solutions offered within 8 hours & remote and on-site training & available user manual and operation video.



Pre-sales consulting, lifetime technical support after sales, online/site maintenance is available. One year warranty for whole machine (consumables excluded).



Type of payment: TT & Paypal & Western Union & L/C & Alipay with Trade Insurance



Strict QC system during production process. Pre-sales site-check & QC check before delivery is acceptable

OUR CERTIFICATE



Notes

01

Published performance results based on laboratory testing. Individual results may vary.

02

VICUT reserves the right to change product specifications without notice.

03

Customers are advised to verify media compatibility before purchase.

04

Warranty claims may be void if unauthorized consumables are used. For technical support, refer to the user manual or contact VICUT directly. Compliance with local regulations is mandatory for all users.

WILLIAM CNC TECHNOLOGY CO., LTD.

Website
www.cncvicut.com

Telephone
+86-551-65774134

Operational Address
Room 306 Block B, Huadi Financial Center Office Building, Shushan District, Hefei, China.